





plastics and wire products for the concrete construction industry

Slab Bolster

- ◆ All plastics composite for maximum strength and no corrosion.
- ◆ Posi-lock clip allows creation of unlimited length.
- ◆ Covers from 0.75" to 4.5" – tallest all plastic bolster in the industry.
- ◆ Bar stops on the back to keep bars from rolling.
- ◆ Small contact points to minimize exposure.
- ◆ A wide-T backbone beam for strength and stability.
- ◆ Standard bolster is used for most applications and a heavy duty design or more demanding applications.
- ◆ Alternate hook and loop coupler for working around corners.
- ◆ Optional plate accessory to convert to slab bolster upper.

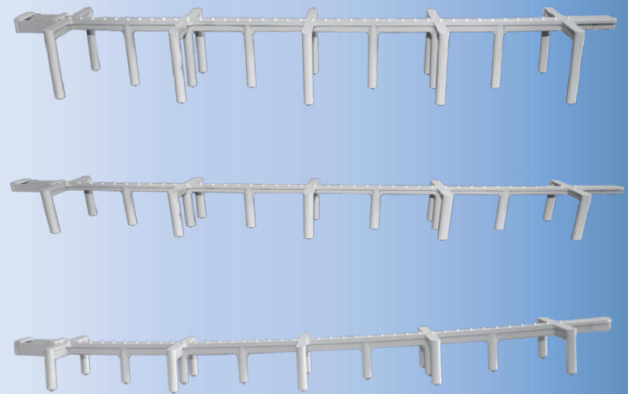

Cover	Std. Slab Bolster	Average lbs./Box	HD Slab Bolster	Average lbs./Box
0.75"	356'	38	-	-
1"	356'	48	-	-
1.25"	300'	40	-	-
1.5"	280'	49	250'	46
1.75"	248'	30	-	-
2"	224'	33	200'	46
2.25"	180'	32	-	-
2.5"	180'	32	160'	48
3"	148'	31	150'	48
3.5"	140'	33	-	-
4"	130'	33	-	-
4.5"	100'	30	-	-